


JME 4 T KNX
Item no.: 4930255



KNX
Actuators DIN rail and gateways

Description

- Extension module MIX2
- Can be upgraded to maximum of 12 channels
- 4-way blind actuator MIX2
- For controlling drives for blinds, shutters, sun and vision protection devices, skylights and ventilation flaps
- Up to 2 extension modules can be connected to a base module
- Up to two extension modules MIX or MIX2 can be connected to one base module
- Device and KNX bus module can be swapped independently of each other
- Removable KNX bus module enables devices to be changed without reprogramming
- Manual set-up and use of actuators is possible without KNX bus module
- Free combination of switches, dimming, blinds and heating control as well as binary inputs
- For controlling drives for blinds, shutters, sun and vision protection devices, skylights and ventilation flaps
- Manual operation on device (even without bus connection)
- LED Up and Down switching status display for each channel
- Potential-free contacts for Up and Down per channel
- Setting option for phase sequence and running time of device
- Copy function for fast configuration

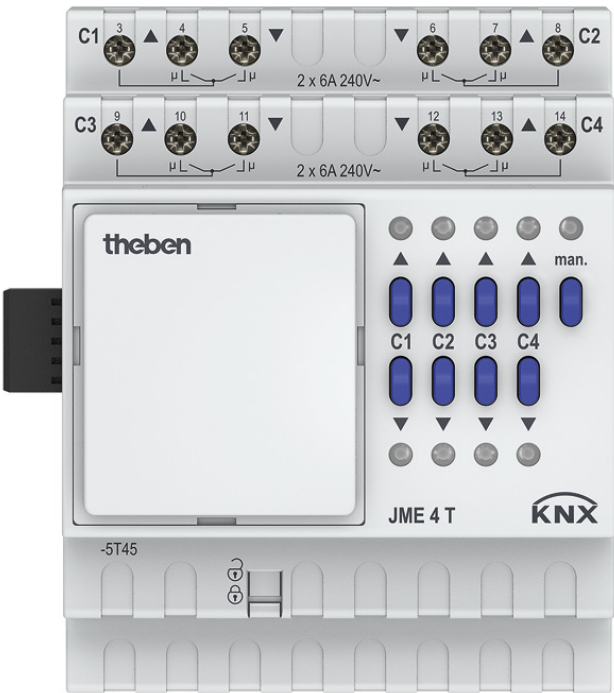

Technical data

JME 4 T KNX	
Number of channels	4
Width	4 modules
Installation type	DIN rail
Type of connection	Screw terminals
Max. cable cross section	Solid wire: 0.5 mm² (Ø 0.8) to 6 mm² Stranded wire with end sleeve: 0.5 mm² to 4 mm²


JME 4 T KNX	
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II according to EN 60 669

JME 4 T KNX


Item no.: 4930255

theben

Connection example



Scale drawings

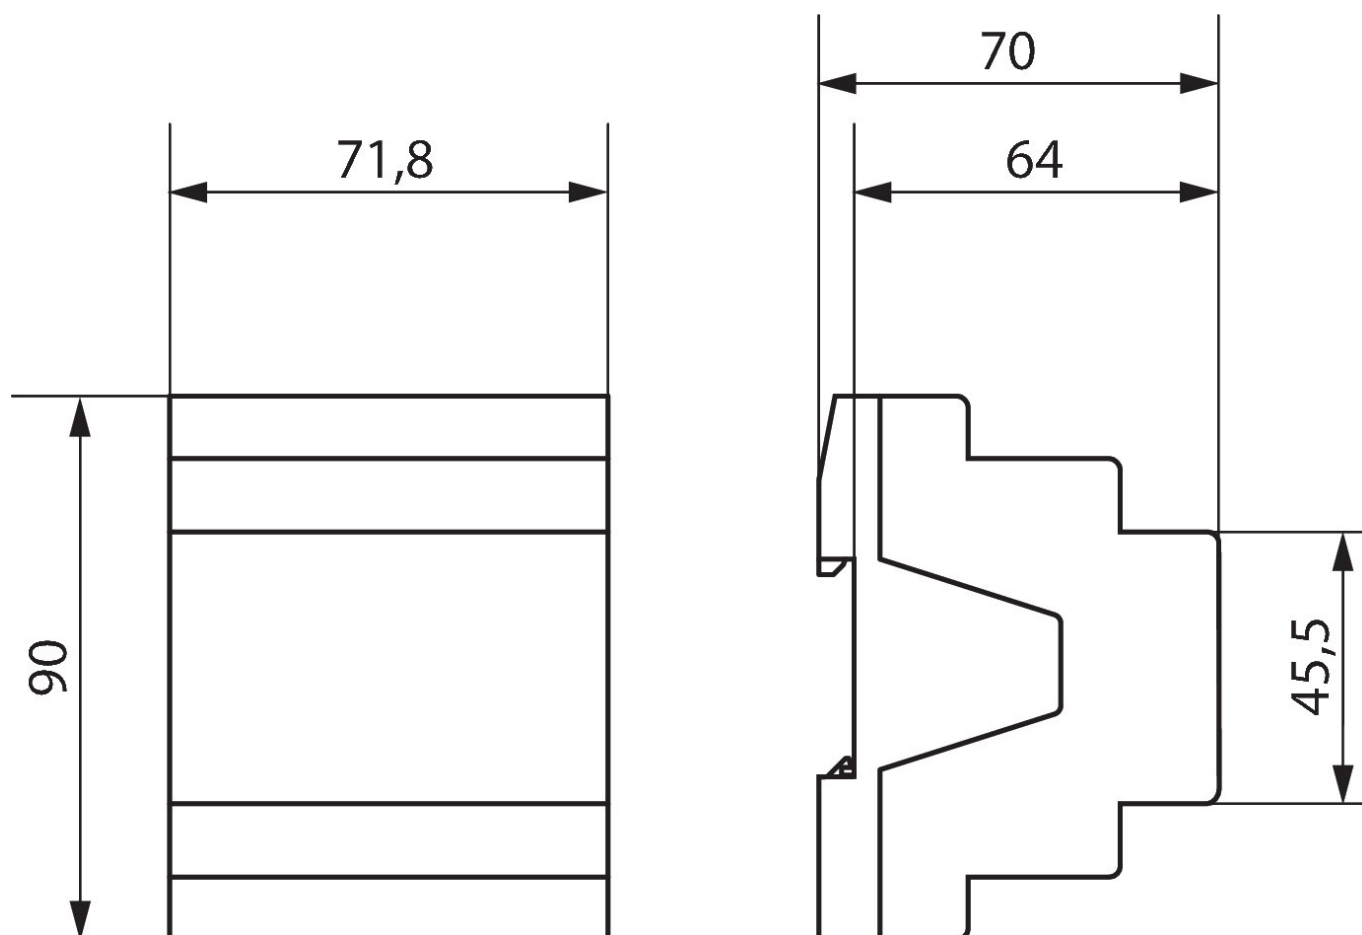

Subject to technical changes and misprints

additional information at: www.theben.de/product/4930255

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.