

JM 4 T KNX

Item no.: 4940250



KNX
Actuators DIN rail and gateways

Description

- 4-way blind actuator FIX1
- For controlling drives for blinds, shutters, sun and vision protection devices, skylights and ventilation flaps
- Manual operation on device (even without bus connection)
- LED Up and Down switching status display for each channel
- Potential-free contacts for Up and Down per channel
- Copy function for fast configuration



Technical data

JM 4 T KNX	
Operating voltage KNX	Bus voltage, ≤4 mA
Operating voltage	110 V AC - 240 V AC, 50 Hz - 60 Hz
Stand-by consumption	~0.3 W
Frequency	50 - 60 Hz
Number of channels	4
Width	4 modules
Installation type	DIN rail
Type of connection	Terminal screws Bus connection: KNX bus terminal

JM 4 T KNX	
Max. cable cross section	Solid wire: 0.5 mm ² (Ø 0.8) to 6 mm ² Stranded wire with end sleeve: 0.5 mm ² to 4 mm ²
Output	NO contact, 6 A
Switching output	Potential-free, for SELV, if the whole device switches SELV
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II according to EN 60 669


Subject to technical changes and misprints
additional information at: www.theben.de/product/4940250
The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

JM 4 T KNX


Item no.: 4940250

theben

Connection example



Scale drawings

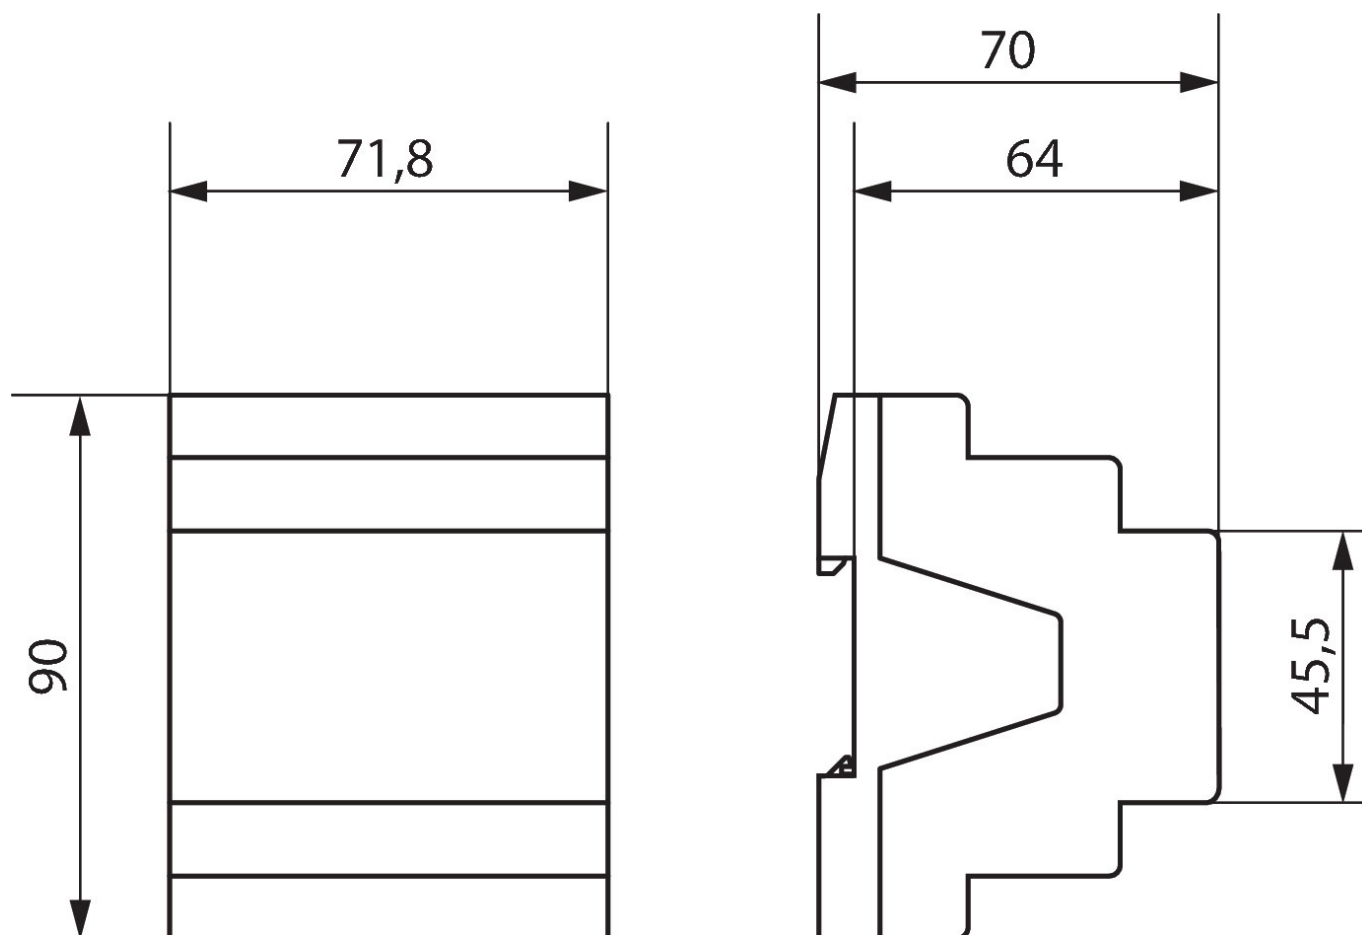

Subject to technical changes and misprints

additional information at: www.theben.de/product/4940250

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

16/03/2024

Page 2 of 2