

IPsecure Interface KNX

Item no.: 9070771




KNX

System devices and sets

Description

- Interface IP and KNX
- Support of KNX IP Secure
- Meets the requirements of the KNXnet/IP standard
- Tunneling: Up to 5 Tunneling Server
- Firmware update (Theben IP Tool Software)
- Power Supply: 12–30 V DC/PoE - IEEE 802.3af class 1

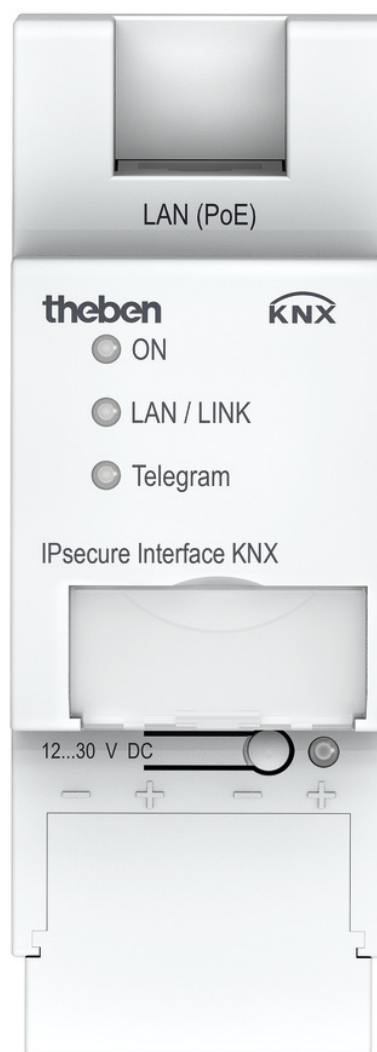

Subject to technical changes and misprints

additional information at: www.theben.de/product/9070771

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

IPsecure Interface KNX

Item no.: 9070771



Technical data

IPsecure Interface KNX	
Operating voltage KNX	Bus voltage, ≤ 10 mA
Operating voltage	12 - 30 V DC
Width	2 modules
Installation type	DIN rail
Type of connection	Bus connection: KNX bus terminal RJ45 for LAN

IPsecure Interface KNX	
Ambient temperature	-5°C ... 45°C
Stock temperature	-25°C ... 55°C
Protection class	II
Type of protection	IP 20

Subject to technical changes and misprints

additional information at: www.theben.de/product/9070771

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.